


Manufacturer of Postforming and Laminating Machinery

Edgetech, Inc.
 11933 12th Avenue South
 Burnsville, MN 55337 USA
 952-881-1925
 fax 952-881-0374
www.EdgetechUSA.com

ABS970 Auxiliary Builddown Stick Machine



Edgetech's ABS970 Auxiliary Builddown Stick Machine is designed to bond additional builddown sticks to the underside of a postformed countertop or bartop.

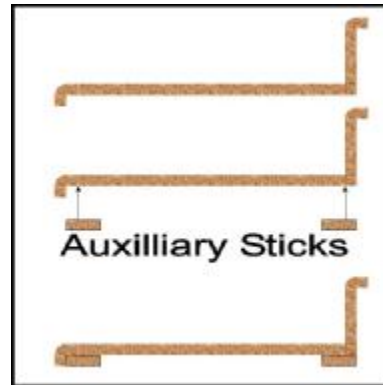

Standard Features

- Automated system with center drive
- Programmable start time and idle mode for hot melt unit
- Builddown stick guide system(s)
- Hot melt bonding system for builddown sticks
- Automatic center drive lubrication

Optional Features

- High capacity hot melt unit
- Custom modifications

ABS970 Auxiliary Builddown Stick Machine Specifications

Submit profiles for review. Some restrictions may apply to combinations of these dimensions.

Model	ABS970	
Deck width	18" – 36"	
Builddown stick thickness	3/8" – 1"	
Builddown stick width	1"-3"	
Countertop length	96" – 145"	
Drive Speed (fixed)	25-35 feet per minute	
Electrical requirement	Machine	230V 50/60 Hz 1 Phase 20 Amp
	Hot melt system	230V 50/60 Hz 1/3 Phase 22 Amp
Air requirement	90 – 100 PSI @ 2 CFM	
Machine working height	37"	
Machine height – approx.	60"	
Machine width x length – approx	84" x 240"	
Shipping weight – approximate	4,200 lbs.	

Production capacities and specifications are provided for the convenience of our customers and are not binding. Edgetech reserves the right to make changes without notice. Please contact us if the above capacities and/or specifications do not meet your requirements.